


Specially designed for when low particulate emission and maximum cleanliness are essential.

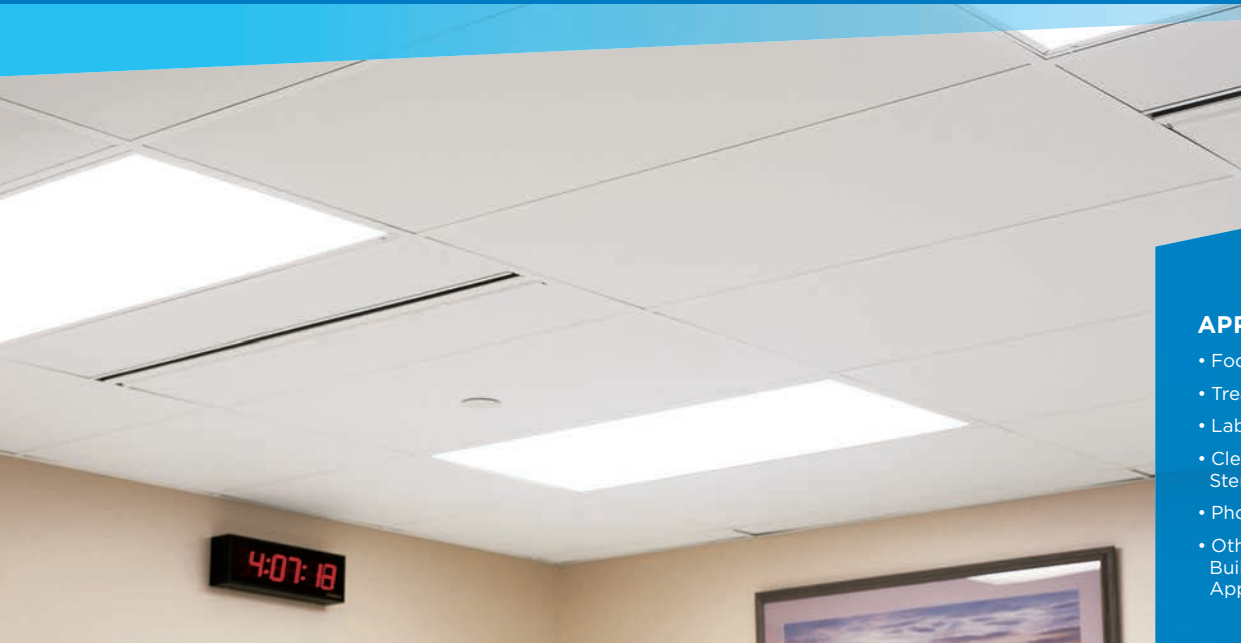


APPLICATIONS

- Food Preparation Areas
- Treatment Rooms
- Laboratories
- Clean Room and Sterile Environments
- Photo-Processing
- Other Commercial Buildings / Space Applications

FEATURES AND BENEFITS

- Gypsum core with vinyl facing, vinyl backing and sealed edges
- Wash tested to 2,000+ cycles with no sign of wear
- Surface suitable for cleaning with common disinfecting/sanitizing chemicals
- Exceeds FGI guidelines for cleanability in healthcare spaces
- Satisfies USDA/FSIS guidelines for sanitary applications
- Approved for use in federally registered Canadian food establishments
- Suitable clean room component to ISO Class 5

SUSPENSION SYSTEM OPTIONS



Trim
15/16 Grid

LEED® v4	
RECYCLED CONTENT	0%
<input type="checkbox"/>	EA: Optimize Energy Performance
<input type="checkbox"/>	EA: Prereq. Min. Energy Performance
<input type="checkbox"/>	EQ: Interior Lighting
<input checked="" type="checkbox"/>	MR: PBT Source Reduction (Healthcare)
<input type="checkbox"/>	EQ: Acoustic Performance
<input type="checkbox"/>	EQ: Prereq. Min. Acoustic Performance (Schools)
<input checked="" type="checkbox"/>	EQ: Low-Emitting Materials
<input checked="" type="checkbox"/>	EQ: Daylight
<input type="checkbox"/>	MR: Material Ingredients (HPDs)
<input type="checkbox"/>	MR: Sourcing Raw Materials
<input type="checkbox"/>	MR: Environmental Product Declarations (EPDs)
<input checked="" type="checkbox"/>	MR: Construction and Demolition Waste Management Planning

LEED® is a registered trademark of the U.S. Green Building Council.

ENVIROGARD™

Smooth
Gypsum

All products in this line feature these attributes:



ENVIROGARD

	Format	Dimensions (in.)	NRC	CAC	Recycled Content	Pieces/carton	Sq. Ft./carton	Lbs./carton	Cartons/pallet	
TRIM										
	1192-CRF-1	Panels	24 x 24 x 1/2	—	34	0%	8	32	60	44
	1190-CRF-1	Panels	24 x 48 x 1/2	—	36	0%	4	32	60	44

CAN'T FIND A SIZE? Contact your local Sales Representative or call 800-233-8990

ACCESSORIES

ENVIROGARD ACCESSORIES	Product Name	Pieces/carton	Use
	1190-SEL-1 Envirogard Edge Sealant	1	For re-sealing cut edges; 1 quart container

PHYSICAL DATA

MATERIAL
Gypsum

ASTM E1264 CLASSIFICATION
Type XX, Pattern G

FIRE CLASS (ASTM E1264)
All are Class A per ASTM E84 & CAN S102
Flame Spread: 25 or less
Smoke Developed: 50 or less

VOC EMISSIONS
Independently certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017.

MAINTENANCE
Wash tested to 2,000+ cycles. Cleanable with sanitizing chemicals.

INSTALLATION CONSIDERATION
Should be installed with an environmental suspension system. See Suspension Systems, page 215.

WARRANTY
10-year 104/90 Limited Warranty increases to 15 years when installed with CertainTeed Suspension Systems. Full warranty information can be found at certainteed.com/ceilings.



CertainTeed

CEILINGS • DECKING • FENCE • GYPSUM • INSULATION • RAILING • ROOFING • SIDING • TRIM
20 Moores Road Malvern, PA 19355 Professional: 800-233-8990 Consumer: 800-782-8777 certainteed.com