

Textured
Mineral Fiber

A finely textured, durable, mineral fiber panel that appears smooth when installed.




APPLICATIONS

- Schools
- Retail / Department Stores
- Offices / Corridors
- Hospitality
- Other Commercial Buildings / Space Applications


FEATURES AND BENEFITS

- Lightly textured surface provides attractive finish with excellent light reflectance
- Customline scoring option gives the appearance of 2'x2' reveal in a 2'x4' panel
- Fine texture gives the appearance of a smooth finish when installed
- Non-directional visual
- High humidity and sag resistant
- Health Product Declaration (HPD) available for this product
- Environmental Product Declaration (EPD) available for this product

SUSPENSION SYSTEM OPTIONS

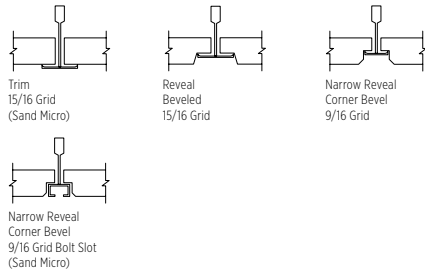

CUSTOMLINE SCORING OPTIONS



LEED® v4	
RECYCLED CONTENT	33%
<input checked="" type="checkbox"/>	EA: Optimize Energy Performance
<input checked="" type="checkbox"/>	EA: Prereq. Min. Energy Performance
<input checked="" type="checkbox"/>	EQ: Interior Lighting
<input checked="" type="checkbox"/>	MR: PBT Source Reduction (Healthcare)
<input type="checkbox"/>	EQ: Acoustic Performance
<input type="checkbox"/>	EQ: Prereq. Min. Acoustic Performance (Schools)
<input checked="" type="checkbox"/>	EQ: Low-Emitting Materials
<input checked="" type="checkbox"/>	EQ: Daylight
<input checked="" type="checkbox"/>	MR: Material Ingredients (HPDs)
<input checked="" type="checkbox"/>	MR: Sourcing Raw Materials
<input checked="" type="checkbox"/>	MR: Environmental Product Declarations (EPDs)
<input checked="" type="checkbox"/>	MR: Construction and Demolition Waste Management Planning

LEED® is a registered trademark of the U.S. Green Building Council.



Textured
Mineral Fiber

All products in this line feature these attributes:



SAG RESISTANT



BIOSHIELD™ MOLD/MILDEW RESISTANT



LR 0.88



EPD AVAILABLE



HPD AVAILABLE



LOW VOC EMISSION COMPLIANT CERTIFIED



RECYCLED CONTENT 33%

SAND MICRO

	Format	Dimensions (in.)	NRC	CAC	Recycled Content	Pieces/carton	Sq. Ft./carton	Lbs./carton	Cartons/pallet		
TRIM											
	NRC 50	SHM-157	Panels	24 x 24 x 5/8	0.50	33	33%	16	64	47	20
		SHM-197	Panels	24 x 48 x 5/8	0.50	35	33%	8	64	47	20
REVEAL											
	NRC 50	SHM-154	Panels	24 x 24 x 5/8	0.50	33	33%	16	64	47	20
		SHM-194	Panels	24 x 48 x 5/8	0.50	35	33%	8	64	47	20
NARROW REVEAL											
	NRC 50	SHM-150	Panels	24 x 24 x 5/8	0.50	33	33%	16	64	47	20
		SHM-190	Panels	24 x 48 x 5/8	0.50	35	33%	8	64	47	20

SAND MICRO CUSTOMLINE

	Format	Dimensions (in.)	NRC	CAC	Recycled Content	Pieces/carton	Sq. Ft./carton	Lbs./carton	Cartons/pallet		
REVEAL											
	NRC 50	SMCL-224	Panels	24 x 48 x 3/4	0.50	35	33%	8	64	62	16
NARROW REVEAL											
	NRC 50	SMCLN-224	Panels	24 x 48 x 3/4	0.50	35	33%	8	64	62.5	16

CAN'T FIND A SIZE? Contact your local Sales Representative or call 800-233-8990

PHYSICAL DATA

MATERIAL
Mineral Fiber

ASTM E1264 CLASSIFICATION
Type III, Form 2, Pattern C E

FIRE CLASS (ASTM E1264)
All are Class A per ASTM E84 & CAN S102
Flame Spread: 25 or less
Smoke Developed: 50 or less

VOC EMISSIONS
Independently certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017.

MOLD/MILDEW RESISTANCE
BioShield treatment included for added mold and mildew resistance.

MAINTENANCE
Wipe with a soft cloth or vacuum with brush attachment.

WARRANTY
10-year 104/90 Limited Warranty increases to 15 years when installed with CertainTeed suspension systems. Full warranty information can be found at certainteed.com/ceilings.



CertainTeed

CEILINGS • DECKING • FENCE • GYPSUM • INSULATION • RAILING • ROOFING • SIDING • TRIM
20 Moores Road Malvern, PA 19355 Professional: 800-233-8990 Consumer: 800-782-8777 certainteed.com